
Product Brief

NLG Extended
Bungee Tool Lanyard

101434



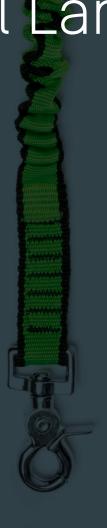

NLG Extended Bungee Tool Lanyard

Product code: 101434

The extra length of the Extended Bungee Tool Lanyard is ideal for reach tasks or working directly from a height safety tool bag.

The NLG Extended Bungee Lanyard reaches to 2m allowing heavier tools to be connected to anchor points, both on and off the user. It is ideally suited for attaching to connection points within NLG's range of bags for working at height including the ground-breaking Ascent BucketTM.

Equipped with the 360° Quick Clip™ connectors at each end, the NLG Extended Bungee Tool Lanyard remains tangle-free even when used with tools that must rotate freely such as screwdrivers, spanners etc.

Quick $Clips^{TM}$ are ergonomically designed for quick connection and disconnection with a built in trigger to facilitate use when wearing gloves.

INSPECTION

In addition to routine checks prior to each use, all equipment should undergo regular detailed inspection, conducted and recorded by a competent person using the NLG Inspection Checklist. If any part is worn or shows signs of degradation, immediately retire from service. In the event of a drop, quarantine the equipment for thorough inspection.

Specification

- Reduced bungee tension allows for precision control and comfortable handling
- Equipped with Quick Clips™ for rapid connection and effortless use with gloves
- Extended product life with high strength, wear resistant webbing
- Faster visual inspections with contrast stitching
- Clever contrast wear indicators ensure early warning of any structural damage
- Unique serial number for easy identification and tracking
- CE marked
- Dynamic load tested and third party certified (2:1 safety factor)
- Dimensions: Extends 100cm to 210cm
- Max Load: 5KG [11lbs]

MAX LOAD (SWL)

5KG / 11LBS


SERIAL NUMBERED

Makes the management of inspection routines and reports easy and traceable


PRODUCT DATA

Weight: 130 Grams

EAN [GTIN-13]: 5060572180291 HTS Code: 5609.00.4000

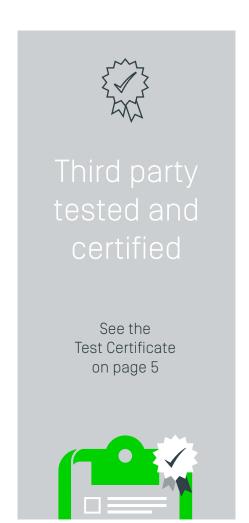

NEVERLETGO.COM 3

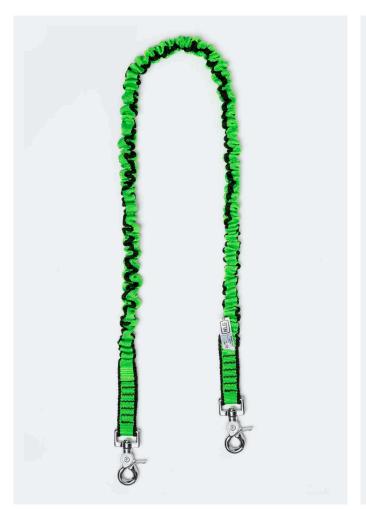







Breathe Safety Testing Laboratory

DROP TEST CERTIFICATE

42815DT-NLG-133434

Manufacturer: Max Load (WLL): **PRODUCT**

IDENTIFICATION NLG 5 KG

> Product: Safety Factor:

Extended Bungee Tool Lanyard 2:1

Reference: Test Load: 10 KG 101434

TEST TECHNICIAN Signature: Name:

Position:

Gary Paterson

Date:

Senior Lab Technician 21-03-17

TEST RESULTS

SAMPLE NUMBER	FACTOR 0	FACTOR 1 DROP 1	FACTOR 1 DROP 2	FACTOR 1 DROP 3	FACTOR 2 DROP 1	FACTOR 2 DROP 2	FACTOR 2 DROP 3
1	PASS	PASS	PASS	PASS	PASS	PASS	PASS
2	PASS	PASS	PASS	PASS	PASS	PASS	PASS
3	PASS	PASS	PASS	PASS	PASS	PASS	PASS

United Kingdom Accreditation Service ACCREDITATION CERTIFICATE



Breathe Safety Limited

Please note that the results included in this report relate only to the specific equipment samples tested. This is for the purpose of Type Approval of Equipment under the PPE Directive. For more detail refer to the full Accredited Laboratory Policy. This report may not be reproduced without authorisation from the $laboratory. \ Any\ deviations\ from\ specific\ test\ methods\ are\ described\ in\ the\ relevant\ section\ of\ the\ report.$

- Fully Equipped Laboratory for CE Type Approval Testing
 Product Trial testing for specific tests
 CE Technical File review and consultancy advice
 CE Certification facilitation through a partner Notified Body

0844 915 1111

17 Whittle Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7RL

NEVERLETGO.COM 5

EU Declaration of Conformity

REFERENCE NUMBER: 364101434133

01 / Manufacturer

02 / Product

NLG	CODE:	101434	
6 Mannings Heath Road	DESCRIPTION:	Extended Bungee Tool Lanyard	
Poole, Dorset, BH12 4NQ	LOAD RATING:	5 KG / 11 LBS	
United Kingdom			
	6 Mannings Heath Road Poole, Dorset, BH12 4NQ	6 Mannings Heath Road DESCRIPTION: Poole, Dorset, BH12 4NQ LOAD RATING:	

03 / Conformity

The undersigned acting on behalf of [01] above hereby Dynamic drop performance testing conducted at 2:1 weight declares that:

Dynamic drop performance testing conducted at 2:1 weight safety factor for tool lanyards and tether points. Static

The PPE described in [02] is in conformity with the provision and scope of our quality control and testing protocols set out in the PPE Regulation (EU) 2016/425 covering all PPE manufacturing, where such is the case, with the standard of fit for purpose design parameters. The above referred to Personal Protective Equipment [02] is identical to the equipment independently tested and certified by BSTL in accordance with EN 364:1992 test methods.

Dynamic drop performance testing conducted at 2:1 weight safety factor for tool lanyards and tether points. Static strength testing conducted at 5:1 weight safety factor for containers and storage equipment.

CERTIFICATE NUMBER:	42815DT-NLG-133434
ISSUED BY:	BSTL, Whittle Road
	Ferndown Ind. Estate, BH217RL, UK

04 / Authorised Person

I herewith certify that the equipment identified above in [02] conforms to the requirements as detailed above:

SIGNED:	Ami
NAME:	Julian Aris
POSITION:	Managing Director
DATE:	25 / 04 / 18

Tool Tethering Experts neverletgo.com



Never Let Go

6 NEVERLETGO.COM



NLG Extended Bungee Tool Lanyard

Product code: 101434

View online neverletgo.com/ extended-bungee-tool-lanyard/

Get all the Product Briefs neverletgo.com

Tool Tethering Experts

neverletgo.com

NLG makes every effort to ensure the information in this Product Brief is accurate and current. However, NLG reserves the right to change the product specification when or if deemed necessary. NLG cannot be held responsible for any inaccuracies or omissions. Copyright © 2018. NLG ®and Never Let Go ® are registered trademarks.