


Product Brief

NLG Extended Coil Tool Lanyard

101476

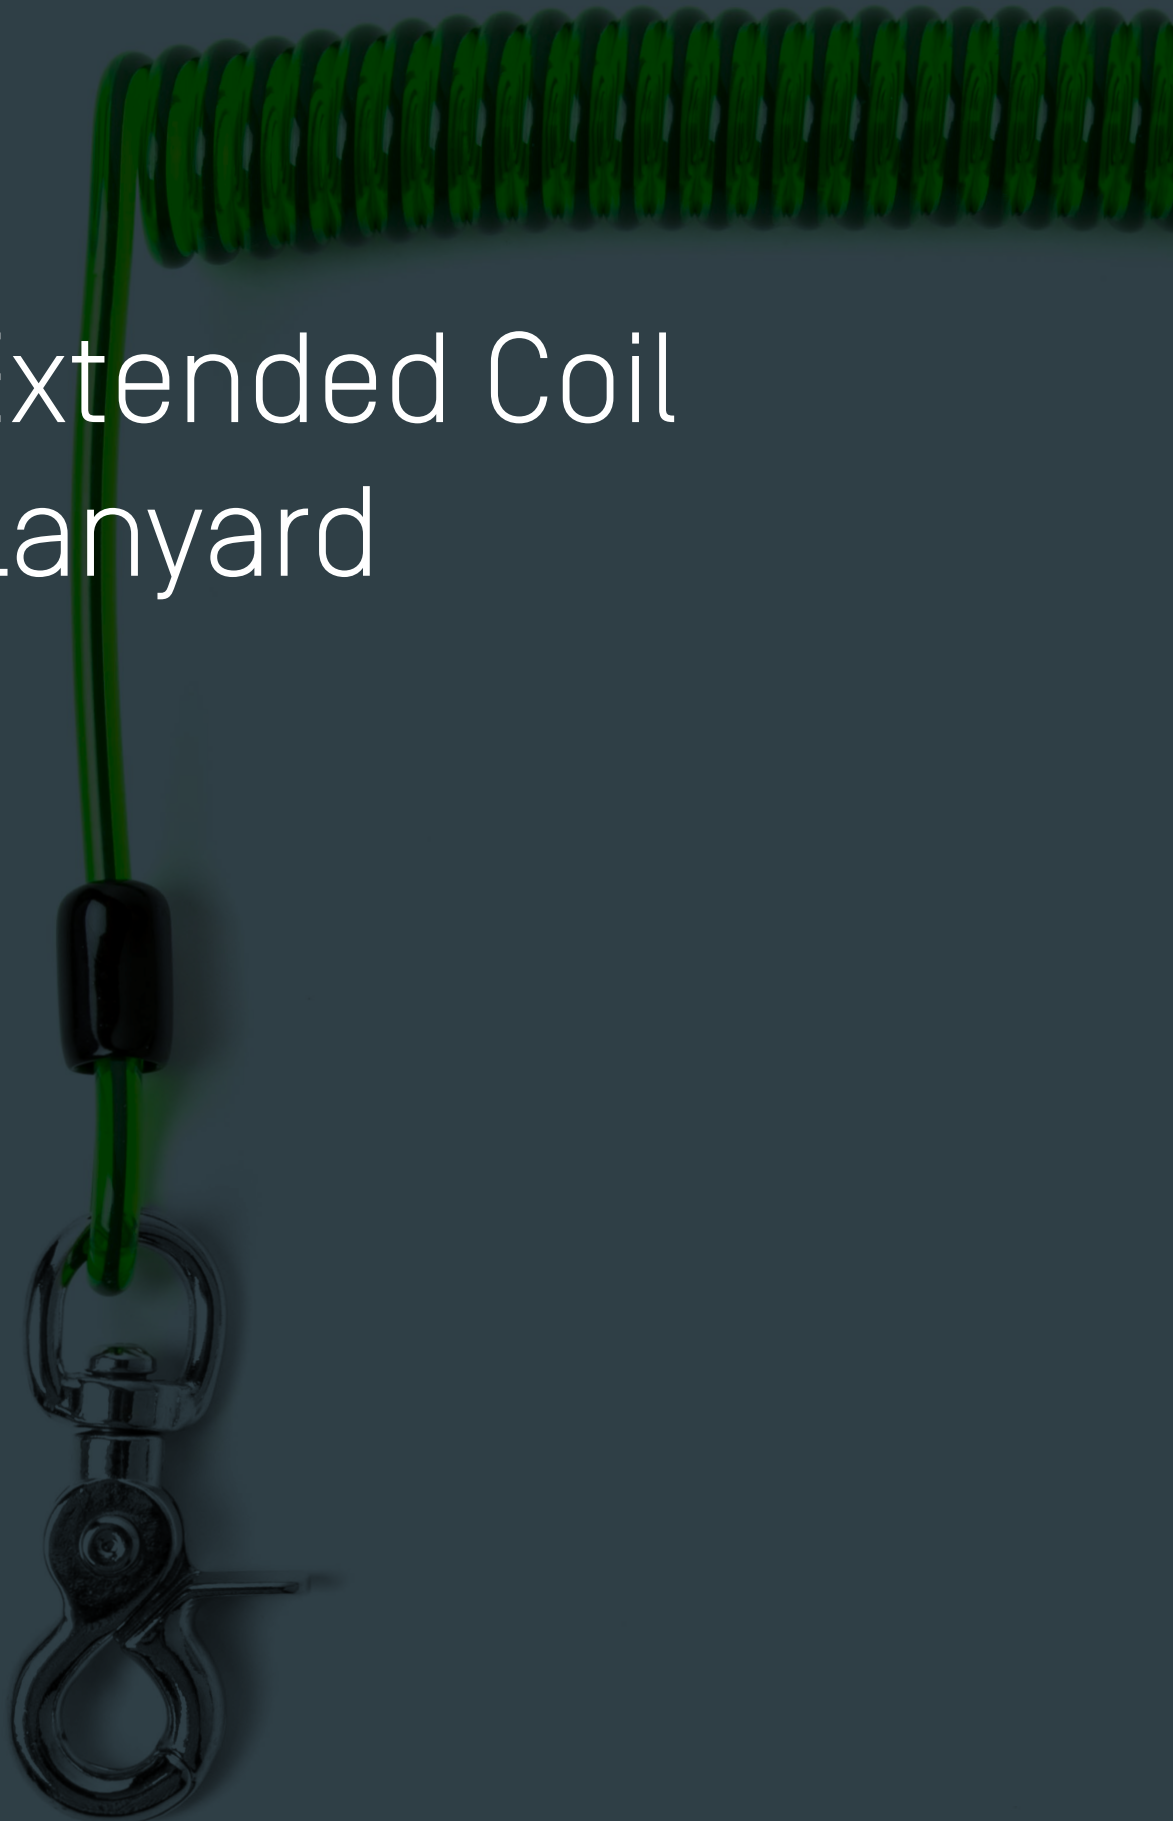

NLG Extended Coil Tool Lanyard

PRODUCT BRIEF / 101476

Product code: 101476

The NLG Extended Coil Tool Lanyard balances lightweight componentry, compact design and exceptional reach to make a great tool lanyard for extended use.

The NLG Extended Coil Tool Lanyard provides effortless reach to 2M so that it can be used comfortably at full stretch for longer tasks. The long length combined with lightweight componentry has made it one of the most popular tool lanyards, across many industries.

The compact coil design makes it a great partner for the NLG Tool Holster (101470). The 360° Quick Clip™ connectors stop any tangles when in use and work well with rotating tools such as scaffold spanners and screwdrivers.

INSPECTION

In addition to routine checks prior to each use, all equipment should undergo regular detailed inspection, conducted and recorded by a competent person using the NLG Inspection Checklist. If any part is worn or shows signs of degradation, immediately retire from service. In the event of a drop, quarantine the equipment for thorough inspection.

Specification

- Low recoil force makes it ideal for extended periods of use
- Compact design stays neatly out of the way and reduces snagging hazards
- Equipped with Quick Clips™ for rapid connection and effortless use with gloves
- Dual spin connector design eradicates coil tension during use
- Anti-puncture wipe clean sleeve makes cleaning easy
- PU core is both strong and lightweight
- Toughened inspection tag is built for harsh environments
- Unique serial number for easy identification and tracking
- CE marked
- Dynamic load tested and third party certified [2:1 safety factor]
- Dimensions: Extends from 14cm to 210cm
- Max Load: 3KG [6.6lbs]

MAX LOAD (SWL)

3KG / 6.6LBS

SERIAL NUMBERED

Makes the management of inspection routines and reports easy and traceable

PRODUCT DATA


Weight: 120 Grams
EAN (GTIN-13): 5060572180222
HTS Code: 7326.90.9890



Third party
tested and
certified

See the
Test Certificate
on page 5



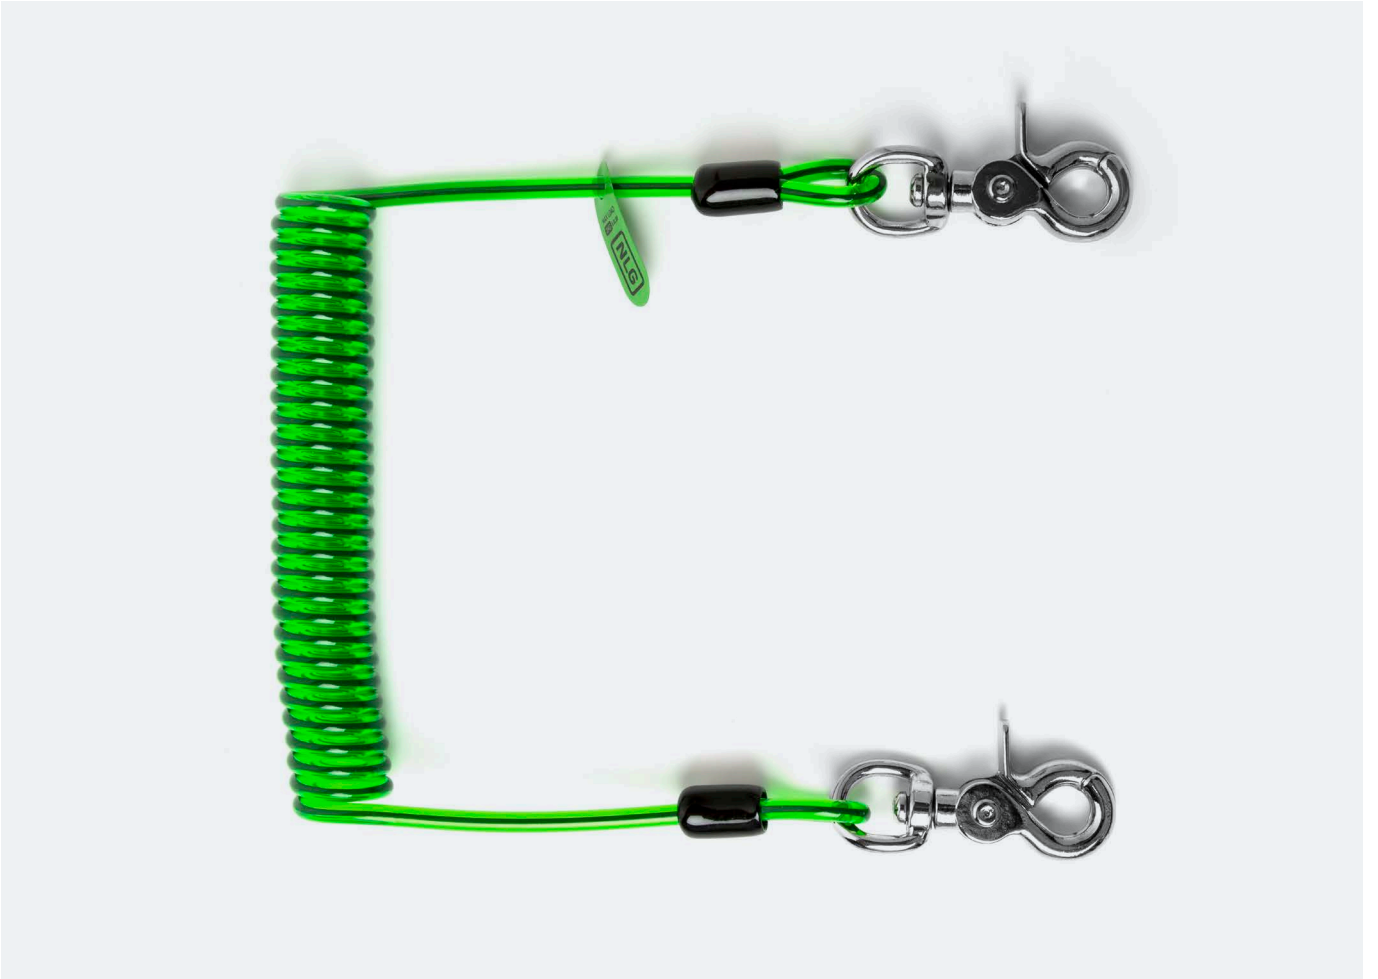



Breathe Safety Testing Laboratory

UKAS Testing No 8856 | Accredited to ISO/IEC17025/2005

DROP TEST CERTIFICATE

42815DT-NLG-128476

PRODUCT IDENTIFICATION

Manufacturer:
NLG

Max Load (WLL):
3 KG

Product:
Extended Coil Tool Lanyard

Safety Factor:
2 : 1

Reference:
101476

Test Load:
6 KG

TEST TECHNICIAN

Signature:

Name:
Gary Paterson

Date:
21-03-17

Position:
Senior Lab Technician

TEST RESULTS

SAMPLE NUMBER	FACTOR 0	FACTOR 1 DROP 1	FACTOR 1 DROP 2	FACTOR 1 DROP 3	FACTOR 2 DROP 1	FACTOR 2 DROP 2	FACTOR 2 DROP 3
1	PASS	PASS	PASS	PASS	PASS	PASS	PASS
2	PASS	PASS	PASS	PASS	PASS	PASS	PASS
3	PASS	PASS	PASS	PASS	PASS	PASS	PASS

United Kingdom Accreditation Service

ACCREDITATION CERTIFICATE



TESTING LABORATORY
No. 8856
Breathe Safety Limited

Please note that the results included in this report relate only to the specific equipment samples tested. This is for the purpose of Type Approval of Equipment under the PPE Directive. For more detail refer to the full Accredited Laboratory Policy. This report may not be reproduced without authorisation from the laboratory. Any deviations from specific test methods are described in the relevant section of the report.

- Fully Equipped Laboratory for CE Type Approval Testing
- Product Trial testing for specific tests
- CE Technical File review and consultancy advice
- CE Certification facilitation through a partner Notified Body

0844 915 1111

17 Whittle Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7RL

EU Declaration of Conformity

REFERENCE NUMBER: **364101476128**

01 / Manufacturer

NAME: NLG
 ADDRESS: 6 Mannings Heath Road
 Poole, Dorset, BH12 4NQ
 United Kingdom

02 / Product

CODE: 101476
 DESCRIPTION: Extended Coil Tool Lanyard
 LOAD RATING: 3 KG / 6.6 LBS

03 / Conformity

The undersigned acting on behalf of [01] above hereby declares that:

The PPE described in [02] is in conformity with the provision and scope of our quality control and testing protocols set out in the PPE Regulation (EU) 2016/425 covering all PPE manufacturing, where such is the case, with the standard of fit for purpose design parameters. The above referred to Personal Protective Equipment [02] is identical to the equipment independently tested and certified by BSTL in accordance with EN 364:1992 test methods.

Dynamic drop performance testing conducted at 2:1 weight safety factor for tool lanyards and tether points. Static strength testing conducted at 5:1 weight safety factor for containers and storage equipment.

CERTIFICATE NUMBER: 42815DT-NLG-128476
 ISSUED BY: BSTL, Whittle Road
 Ferndown Ind. Estate, BH217RL, UK

04 / Authorised Person

I herewith certify that the equipment identified above in [02] conforms to the requirements as detailed above:

SIGNED: 
 NAME: Julian Aris
 POSITION: Managing Director
 DATE: 25 / 04 / 18

Tool Tethering Experts
neverletgo.com





NLG Extended Coil Tool Lanyard

Product code: 101476

View online

neverletgo.com/extended-coil-tool-lanyard/

Get all the Product Briefs

neverletgo.com

Tool Tethering Experts
neverletgo.com

NLG makes every effort to ensure the information in this Product Brief is accurate and current. However, NLG reserves the right to change the product specification when or if deemed necessary. NLG cannot be held responsible for any inaccuracies or omissions. Copyright © 2018. NLG ® and Never Let Go ® are registered trademarks.